

破面(次頁)



5mm

表面拡大




10mm




5mm

・材料




・試験方法



・試験片





・試験温度



°C


23

・負荷応力
(23MPa)・破断時間
(453.8h)・溶液
(界面活性剤)

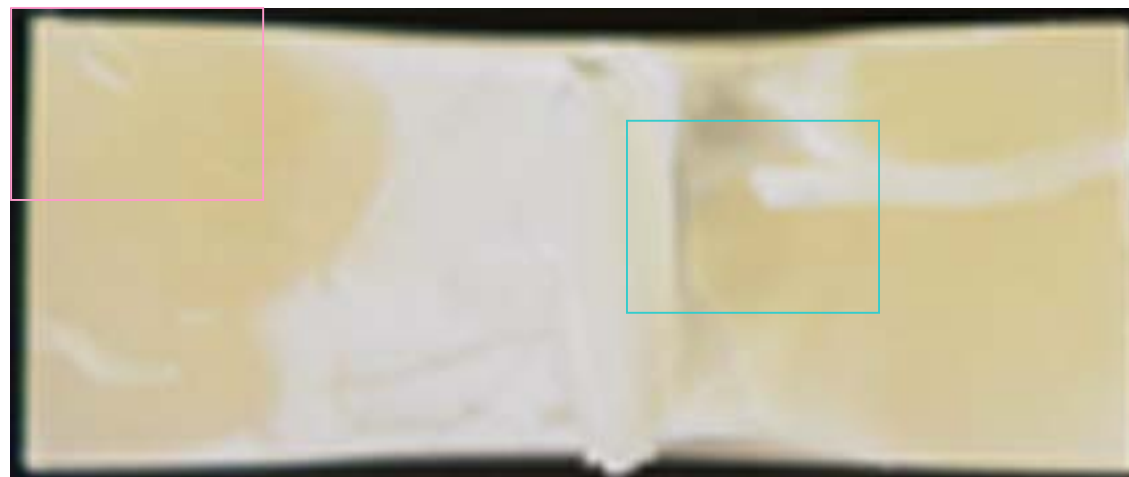


(a) 破面全体

2mm

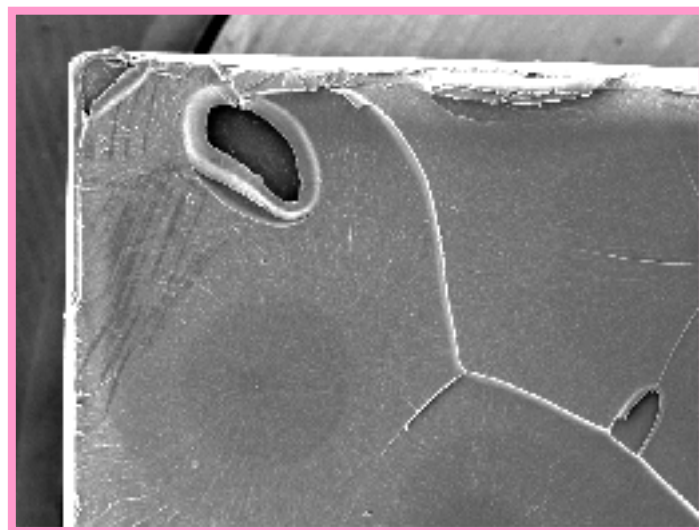

(b) 拡大1


500 μm

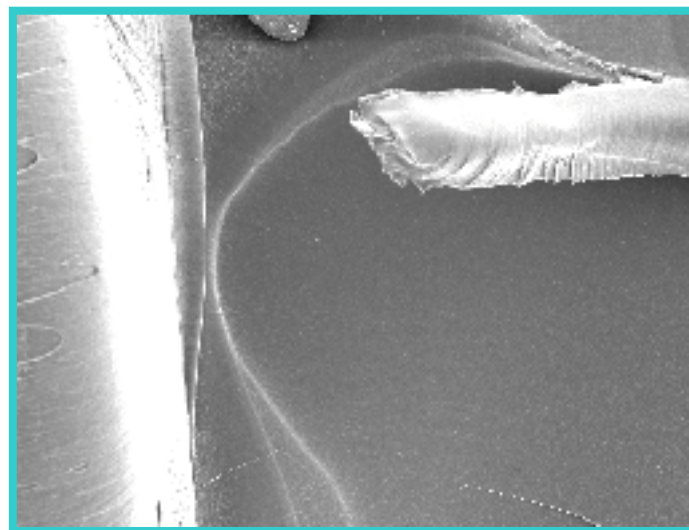


(c) 拡大2

500 μm

・材料




・試験方法



・試験片



・試験温度

・負荷応力
(23MPa)・破断時間
(453.8h)・溶液
(界面活性剤)