

破面(次頁)



5mm

表面拡大




5mm




10mm

ABS23VO
20MP2

・材料




・試験方法



・試験片




・試験温度

・負荷応力
(20MPa)・破断時間
(439.7h)・溶液
(植物油)




(a) 破面全体

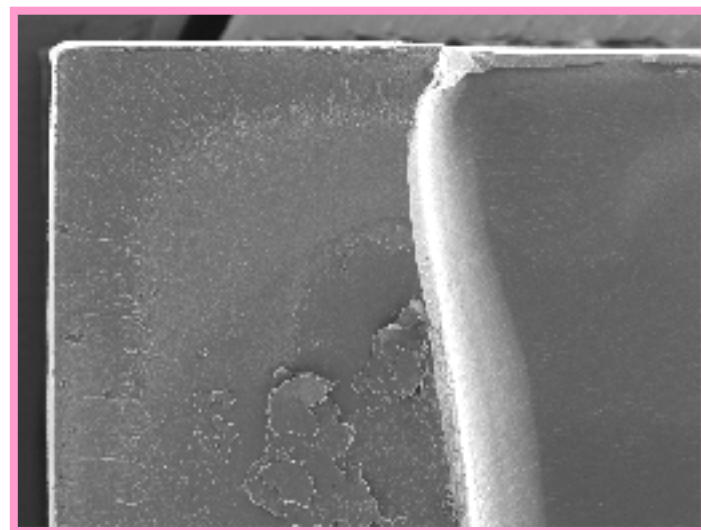

(b) 拡大1

500 μm

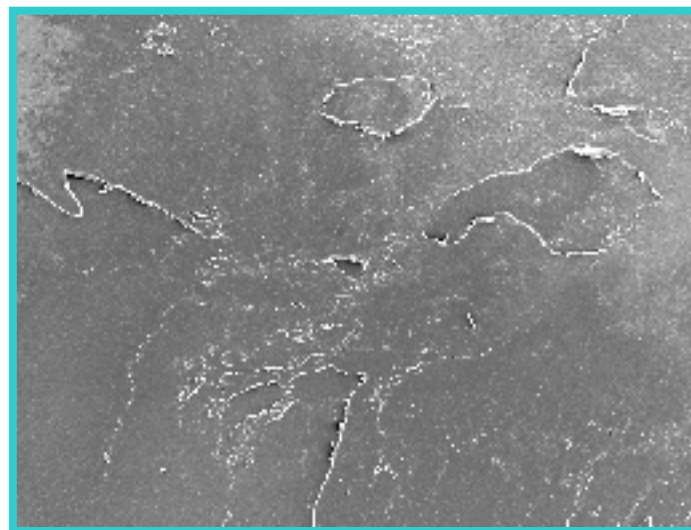


(c) 拡大2


500 μm

・材料

料




・試験方法



・試験片



・試験温度

・負荷応力
(20MPa)・破断時間
(439.7h)

・溶

液
(植物油)